




BRUCHA

► HABA-Universal 100

the versatile insulated
hinged door for warehouses

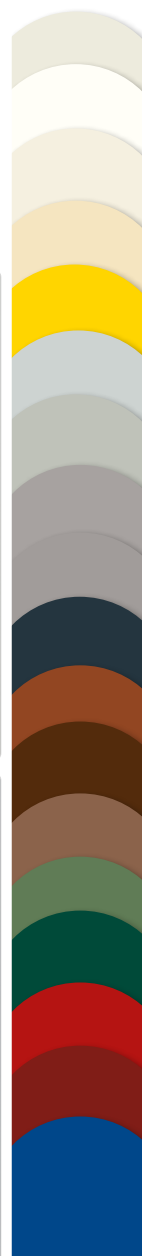

- Perfect insulation PUR 100 mm
- Measurements 1,000 x 2,000 mm or 1,200 x 2,200 mm
- Door leaf available in all BRUCHA colors, Frame RAL 7016



Panels that connect.


BRUCHA HABA-Universal 100




Data sheet:

	NAME	BRUCHA HABA-Universal 100 - insulated hinged door
DOOR LEAF	U-Value W/m ² K	0.186
	Door leaf thickness	100 mm
	Insulating core	Pressure filled with rigid polyurethane foam, securely attached to the steel sheet
	Seal	Foodstuff safe seal on 3 sides sweeping seal on base optional
HINGE / HANDLES / FRAMES	Door leaf surface outside and inside	Galvanized steel sheet, both sides 0.6 mm outside color group BASIC, inside RAL 9002
	Flush mounted frame	Panel assembly 80 to 200 mm, reveal industrial rib 1.5 mm galvanized steel sheet, outside RAL 7016, inside RAL 9002
	Door size	Inside dimensions mm: 1,000 x 2,000 or 1,200 x 2,200
	Door handle	Alu-handle, handle or button (protective plate) + standard lock
	Alu-hinges type	A901 burglary-resistant
	Door stop	Optional DIN right or DIN left
	Door sill model	Finished floor
	Panic door fitting	Optional

CUT A-A

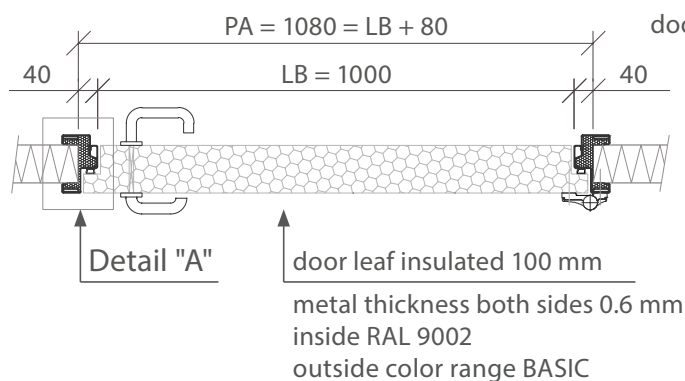

Detail "A"

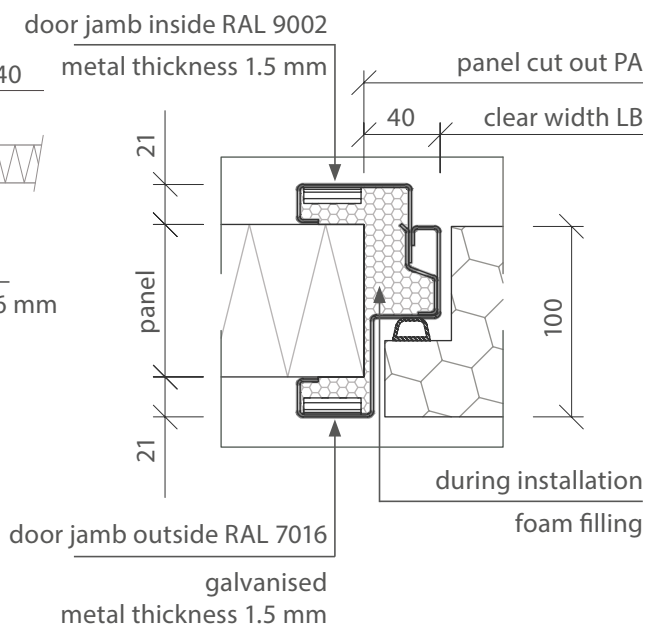

www.brucha.com



typsetting and print errors excepted